



**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : S7</b>			<b>CONVEYOR TOASTER</b>		
<b>QUANTITY:4</b>					
<b>IMPORTED</b>					
<b>SIZE : IN MM</b>					
<b>WIDTH</b>	<b>DEPTH</b>	<b>HEIGHT</b>			
<b>470</b>	<b>578</b>	<b>422</b>			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
<b>HATCO</b>	<b>TQ - 1800</b>				
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<ul style="list-style-type: none"> <li>• Hatco'sColorGuard sensing system assures toast uniformity</li> <li>• Optional power save mode with indicator light saves energy and money during slow periods</li> <li>• Efficient design of front or rear discharge allows Toast-Qwik to be placed where it is most convenient – for sending product to operator side or customer/server</li> <li>• BA models toast one side only and are for bagels and buns only, cut side up</li> <li>• Opening height is 2" (5 mm) and for H models is 3" (8 mm)</li> <li>• Insulation and an interior fan provide cool surface temperatures</li> <li>• Toast storage area keeps bread warm and dry</li> <li>• Permanently lubricated ball bearing motor and heating elements guaranteed against burnout and breakage for two years</li> </ul>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	3X4=12KW				
Voltage	1 PH				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/>	NA			
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : SIRMAN-TOSTI 18 W (COMPARATIVE MODEL)</b>					


**IMPORTED BOUGHT OUT LIST**

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

ITEM NO : HK6		COMBI OVEN 20 TRAY 1/1 GAS																													
QUANTITY : 1																															
IMPORTED																															
SIZE : IN MM																															
WIDTH	DEPTH			HEIGHT																											
877	913			1807																											
BRAND	MODEL			COUNTRY OF ORIGIN																											
RATIONAL	iCombi Pro ICP																														
M.E.P REQUIRMENT		SPECIFICATIONS																													
PLUMBING :		<div style="background-color: #34495e; color: white; padding: 5px; display: flex; align-items: center;"> <span style="font-size: 24px; margin-right: 10px;">✂</span> <span>Product Specifications</span> </div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Meals Per Day</td> <td>150-300</td> </tr> <tr> <td>Material</td> <td>Stainless Steel Grade: 304</td> </tr> <tr> <td>Voltage</td> <td>230V</td> </tr> <tr> <td>Warranty</td> <td>Manufacturers 2 years parts &amp; labour</td> </tr> <tr> <td>Product Weight</td> <td>284 KG <a href="#">(convert)</a></td> </tr> <tr> <td>Power Supply</td> <td>Natural Gas &amp; 13 Amp</td> </tr> <tr> <td>Width (External)</td> <td>877mm <a href="#">(convert)</a></td> </tr> <tr> <td>Height (External)</td> <td>1807mm <a href="#">(convert)</a></td> </tr> <tr> <td>Depth (External)</td> <td>913mm <a href="#">(convert)</a></td> </tr> <tr> <td>Finish</td> <td>Stainless Steel</td> </tr> <tr> <td>Gas Type</td> <td>Natural Gas</td> </tr> <tr> <td>Power Type</td> <td>Natural Gas</td> </tr> <tr> <td>Gastronorm Capacity</td> <td>20 x 1/1 GN / 40 x 1/2 GN</td> </tr> <tr> <td>Combi Range</td> <td>iCombi Pro</td> </tr> </table>		Meals Per Day	150-300	Material	Stainless Steel Grade: 304	Voltage	230V	Warranty	Manufacturers 2 years parts & labour	Product Weight	284 KG <a href="#">(convert)</a>	Power Supply	Natural Gas & 13 Amp	Width (External)	877mm <a href="#">(convert)</a>	Height (External)	1807mm <a href="#">(convert)</a>	Depth (External)	913mm <a href="#">(convert)</a>	Finish	Stainless Steel	Gas Type	Natural Gas	Power Type	Natural Gas	Gastronorm Capacity	20 x 1/1 GN / 40 x 1/2 GN	Combi Range	iCombi Pro
Meals Per Day	150-300																														
Material	Stainless Steel Grade: 304																														
Voltage	230V																														
Warranty	Manufacturers 2 years parts & labour																														
Product Weight	284 KG <a href="#">(convert)</a>																														
Power Supply	Natural Gas & 13 Amp																														
Width (External)	877mm <a href="#">(convert)</a>																														
Height (External)	1807mm <a href="#">(convert)</a>																														
Depth (External)	913mm <a href="#">(convert)</a>																														
Finish	Stainless Steel																														
Gas Type	Natural Gas																														
Power Type	Natural Gas																														
Gastronorm Capacity	20 x 1/1 GN / 40 x 1/2 GN																														
Combi Range	iCombi Pro																														
Cold	<input type="checkbox"/> YES																														
Hot	<input type="checkbox"/> NA																														
DRAIN	<input type="checkbox"/> YES																														
ELECTRIC :																															
Power	1.5 KW																														
Voltage	1 PHASE																														
EXHAUST																															
YES																															
GAS: - NA																															
BTU																															
Con.	<input type="checkbox"/> YES																														
ACCESSORIES:																															
SPECIAL NOTE:																															
ALTERNATE TO MATCH SPECIFICATION : ELECTROLUX / CONVOTHERM																															


IMPORTED BOUGHT OUT LIST

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

ITEM NO : HK6A			I COMBI PRO TROLLEY 201		
QUANTITY: 2					
IMPORTED					
SIZE: IN MM					
WIDTH:	DEPTH:	HEIGHT:			
561	824	1743			
BRAND	MODEL	COO			
RATIONAL	I COMBI PRO 201	GERMANY			
M.E.P REQUIRMENT			SPECIFICATIONS		
PLUMBING :			<ul style="list-style-type: none"> <li>• Compatible with 201 combi ovens.</li> <li>• Made from high grade stainless steel.</li> <li>• The low rack height of no more than 1.60m allows the unit to be loaded &amp; unloaded quickly.</li> <li>• Oversized, quiet &amp; hygienic tandem castors for easy movement.</li> <li>• Standard 20 racks, 15 racks (84mm), 16 racks (80mm), 17 racks (74mm) or bakery standard options available</li> </ul>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
ELECTRIC :					
Power					
Voltage					
EXHAUST					
YES					
GAS: NA					
BTU	NA				
Con.	<input type="checkbox"/>	NA			
ACCESSORIES:					
SPECIAL NOTE:					
ALTERNATE TO MATCH SPECIFICATION : ELECTROLUX / CONVOTHERM					


IMPORTED BOUGHT OUT LIST

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : HK21A</b>			<b>WALL MOUNT POT FILLER</b>		
<b>QUANTITY: 8</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
Length	Width:	Height:			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
T&S	B-0581	US			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			Product Id: B-0581 Product Description: Pot Filler, Wall Mount, 24" Double-Joint Nozzle, 1/2" NPT Inlet, Insulated On-Off Control  Written Specifications: Wall mount pot filler with chrome plated brass body, 24" double joint swing nozzle, on-off volume control outlet with insulated grip, 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.  Features & Benefits: Wall mount pot filler w/ chrome plated brass body 24" double joint swing nozzle with 12" back nozzle and 12" front nozzle On-off volume control outlet with insulated grip 1/2" NPT female inlet 2" wall flange  Material: Polished chrome plated brass body & tubular spouts Attributes: Nozzle:Swivel Nozzle:Double Joint Nozzle:24" Nozzle:12" Nozzle Outlet:On-Off Volume Control Nozzle Outlet:Heat Resistant		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	NA				
Voltage	NA				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/>	NA			
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : FISHER</b>					


**IMPORTED BOUGHT OUT LIST**

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

<b>ITEM NO :VP4</b>			<b>VEG PROCESSOR</b>		
<b>QUANTITY: 2</b>					
<b>IMPORTED</b>					
<b>SIZE :IN MM</b>					
<b>WIDTH</b>	<b>DEPTH</b>	<b>HEIGHT</b>			
210	281	389			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
ROBOT COUPE	CL 50 E ultra				
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<p>Prepare 1200 plus servings in 3 hours or less. Continuous feed unit designed for quality, continuous feed slicing, dicing, shredding, grating, French fry and julienne. Accommodates 34 different processing plates.</p> <p><b>Power:</b> 1.5 HP—Single phase.</p> <p><b>Speed:</b> 425 rpm.</p> <p><b>Induction motor:</b> Magnetic safety system and motor brake. Stainless steel motor base. Automatic restart of the machine with the kidney shaped pusher.</p> <p><b>Delivered with :</b>All metal vegetable prep attachment with a kidney shaped hopper (L x W—7 6.6" x 3") and a cylindrical hopper (diameter 2 5/16").discs included : C446SA (3mm) 1/8" slicing disc and C450GPA (3mm) 1/8" grating discComplete selection of 40 discs available. Processor has dicing and French fry capabilities.</p> <p><b>Cube :</b> 3.57</p> <p><b>Approx. shipping weight</b>—53 lbs</p> <p><b>Approx. carton size :</b> (HxLxW) : 24 1/2" x 15 3/4" x 16"</p>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	2 KW				
Voltage	I PHASE				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	NA				
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<p><b>ALTERNATE TO MATCH SPECIFICATION : FIMAR TV-3000NC</b></p>					


**IMPORTED BOUGHT OUT LIST**

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : MS8</b>			<b>WALL MOUNTED POT FILLER</b>		
<b>QUANTITY: 2</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
Length	Width:	Height:			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
T&S	B-0580	US			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<ul style="list-style-type: none"> <li>• Body: Single Hole</li> <li>• Body: Single Temp</li> <li>• Body Mount: Wall</li> <li>• Material: Brass Construction</li> <li>• Nozzle: 12 in (304.8 mm)</li> <li>• Nozzle: 18 in (457.2 mm)</li> <li>• Nozzle: 6 in (152.4 mm)</li> <li>• Nozzle: Double Joint</li> <li>• Nozzle: Nozzle</li> <li>• Nozzle: Swivel</li> <li>• Nozzle Flow: 12.3 GPM (46.56 L/min)</li> <li>• Nozzle Outlet Type: Heat Resistant</li> <li>• Nozzle Outlet Type: On-Off Volume Control</li> <li>• Pressure Max: Pressure Max: 125 psi (8.62 bar)</li> <li>• Pressure Min: Pressure Min: 20 psi (1.38 bar)</li> <li>• Temperature Max: Temperature Max: 140 F (60°C)</li> <li>• Temperature Min: Temperature Min: 40 F (4.44°C)</li> </ul>		
Cold	<input type="checkbox"/>	YES			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	NA				
Voltage	NA				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/> NA				
Con.	<input type="checkbox"/> NA				
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : FISHER</b>					

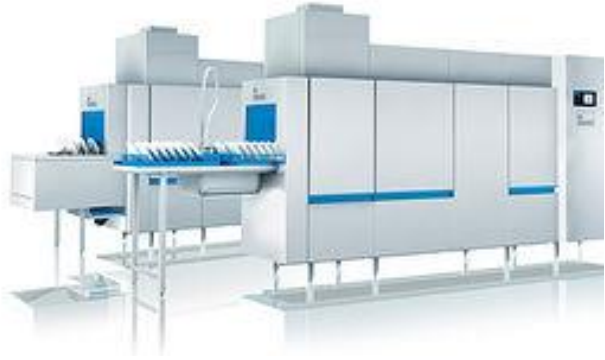
**IMPORTED BOUGHT OUT LIST**

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : DW4</b>			<b>HAND SPRAY UNIT DECK MOUNTED</b>		
<b>QUANTITY: 1</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
Length	Width:	Height:			
<b>BRAND</b>	<b>MODEL</b>	<b>CCO</b>			
T & S	5PR-8D00	US			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<ul style="list-style-type: none"> <li>• Body: 8 in Centers (203.2 mm)</li> <li>• Body Mount: Deck</li> <li>• Brand: Equip</li> <li>• Cartridge-Spindle: Ceramic</li> <li>• Feature: 6 in Wall Bracket (152.4 mm)</li> <li>• Feature: Check Valve</li> <li>• Handle: Lever</li> <li>• Inlet: 1/2 in NPT Female</li> <li>• Inlet: Adjustable Centers</li> <li>• Material: Brass Construction</li> <li>• Pressure Max: Pressure Max: 125 psi (8.62 bar)</li> <li>• Pressure Min: Pressure Min: 20 psi (1.38 bar)</li> <li>• Spray Valve: EQUIP 5SV (1.15 GPM) (4.35 L/min)</li> <li>• Spray Valve Flow: Spray Valve Flow: 1.15 GPM (4.35 L/min)</li> <li>• Temperature Max: Temperature Max: 140 F (60°C)</li> <li>• Temperature Min: Temperature Min: 40 F (4.44°C)</li> </ul>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	NA				
Voltage	NA				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/>	NA			
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : FISHER</b>					

**IMPORTED BOUGHT OUT LIST**

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

<b>ITEM NO : DW6</b>			<b>DISH WASHER WITH DRYER TR600 WORKING DIRECTION RIGHT TO LEFT</b>																																																								
<b>QUANTITY: 1</b>																																																											
<b>IMPORTED</b>																																																											
<b>SIZE :</b>																																																											
Length	Width:	Height:																																																									
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>																																																									
MEIKO	UPESTER KM250	GERMANY																																																									
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>																																																								
<b>PLUMBING :</b>			<table border="1"> <tr> <td><b>Performance*</b></td> <td>Contact time*</td> <td>2 minutes</td> </tr> <tr> <td></td> <td>Transport speed 1 (DIN EN)</td> <td>1.04 m/min</td> </tr> <tr> <td></td> <td>Transport speed 2</td> <td>1.58 m/min</td> </tr> <tr> <td></td> <td>Transport speed 3</td> <td>2.08 m/min</td> </tr> <tr> <td></td> <td>Rack capacity 1 (DIN EN)</td> <td>125 racks/h</td> </tr> <tr> <td></td> <td>Rack capacity 2</td> <td>190 racks/h</td> </tr> <tr> <td></td> <td>Rack capacity 3</td> <td>250 racks/h</td> </tr> <tr> <td><b>Motors</b></td> <td>Total</td> <td>3.2 kW</td> </tr> <tr> <td><b>Heating energies</b></td> <td>Total</td> <td>18.5 kW</td> </tr> <tr> <td><b>Electrical feeding cable**</b></td> <td>Power supply</td> <td>3N PE 400V 50Hz</td> </tr> <tr> <td></td> <td>nominal capacity</td> <td>21.8 kW</td> </tr> <tr> <td></td> <td>nominal current</td> <td>35.5 A</td> </tr> <tr> <td></td> <td>Max. Elect. cable cross-section, Connecting line made of copper [CU]</td> <td>35 mm<sup>2</sup></td> </tr> <tr> <td><b>Consumption***</b></td> <td>Average consumption during typical operation</td> <td>14.7 kW</td> </tr> <tr> <td><b>Water connection: soft cold water 12 - 24°C</b></td> <td>Fresh water final rinse</td> <td>160 l/h</td> </tr> <tr> <td></td> <td>Tank filling</td> <td>90 l</td> </tr> <tr> <td><b>Exhaust air values***</b></td> <td>Exhaust air volume approx.</td> <td>150 m<sup>3</sup>/h</td> </tr> <tr> <td></td> <td>Exhaust air temperature approx.</td> <td>25 °C</td> </tr> </table>			<b>Performance*</b>	Contact time*	2 minutes		Transport speed 1 (DIN EN)	1.04 m/min		Transport speed 2	1.58 m/min		Transport speed 3	2.08 m/min		Rack capacity 1 (DIN EN)	125 racks/h		Rack capacity 2	190 racks/h		Rack capacity 3	250 racks/h	<b>Motors</b>	Total	3.2 kW	<b>Heating energies</b>	Total	18.5 kW	<b>Electrical feeding cable**</b>	Power supply	3N PE 400V 50Hz		nominal capacity	21.8 kW		nominal current	35.5 A		Max. Elect. cable cross-section, Connecting line made of copper [CU]	35 mm <sup>2</sup>	<b>Consumption***</b>	Average consumption during typical operation	14.7 kW	<b>Water connection: soft cold water 12 - 24°C</b>	Fresh water final rinse	160 l/h		Tank filling	90 l	<b>Exhaust air values***</b>	Exhaust air volume approx.	150 m <sup>3</sup> /h		Exhaust air temperature approx.	25 °C
<b>Performance*</b>	Contact time*	2 minutes																																																									
	Transport speed 1 (DIN EN)	1.04 m/min																																																									
	Transport speed 2	1.58 m/min																																																									
	Transport speed 3	2.08 m/min																																																									
	Rack capacity 1 (DIN EN)	125 racks/h																																																									
	Rack capacity 2	190 racks/h																																																									
	Rack capacity 3	250 racks/h																																																									
<b>Motors</b>	Total	3.2 kW																																																									
<b>Heating energies</b>	Total	18.5 kW																																																									
<b>Electrical feeding cable**</b>	Power supply	3N PE 400V 50Hz																																																									
	nominal capacity	21.8 kW																																																									
	nominal current	35.5 A																																																									
	Max. Elect. cable cross-section, Connecting line made of copper [CU]	35 mm <sup>2</sup>																																																									
<b>Consumption***</b>	Average consumption during typical operation	14.7 kW																																																									
<b>Water connection: soft cold water 12 - 24°C</b>	Fresh water final rinse	160 l/h																																																									
	Tank filling	90 l																																																									
<b>Exhaust air values***</b>	Exhaust air volume approx.	150 m <sup>3</sup> /h																																																									
	Exhaust air temperature approx.	25 °C																																																									
Cold	<input type="checkbox"/>	YES																																																									
Hot	<input type="checkbox"/>	NA																																																									
DRAIN	<input type="checkbox"/>	YES																																																									
<b>ELECTRIC :</b>																																																											
Power	37 KW																																																										
Voltage	440V/3PH/50/60HZ																																																										
<b>EXHAUST</b>																																																											
NA																																																											
<b>GAS:</b>																																																											
BTU	<input type="checkbox"/>	NA																																																									
Con.	<input type="checkbox"/>	NA																																																									
<b>ACCESSORIES:</b>																																																											
<b>SPECIAL NOTE:</b>																																																											
<b>ALTERNATE BRAND:-HOBART / WINTERHALTER (COMPARATIVE MODEL)</b>																																																											

**IMPORTED BOUGHT OUT LIST**




**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : DW6A</b>			<b>SOFTENER MEIKO</b>		
<b>QUANTITY: 1</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
Length	Width:	Height:			
<b>346</b>	<b>528</b>	<b>1086</b>			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
MEIKO	CS15H-1035	GERMANY			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<b>PERFORMANCE DATA SHEET AND SPECIFICATIONS</b>		
Cold	<input type="checkbox"/>	YES	MODEL - CS15H-1035		
Hot	<input type="checkbox"/>	NA	CONTROL SYSTEM BNT -850 CONTROL VALVE		
DRAIN	<input type="checkbox"/>	YES	INTEGRATED METER IN BYPASS - YES		
<b>ELECTRIC :</b>			HARDNESS REMOVAL - 872 GRAM		
Power	2 KW		RESIN QUANTITY - 25 L		
Voltage	230V/IPH/50/60HZ		<b>RECOMMENDED CYCLE SETTINGS</b>		
<b>EXHAUST</b>			BACKWASH DURATION SETTING - 3 MIN		
NA			BRINE DURATION SETTING - 45 MIN		
<b>GAS:</b>			RINSE DURATION SETTING - 3 MIN		
BTU	<input type="checkbox"/>	NA	REFILL DURATION SETTING - 3 MIN		
Con.	<input type="checkbox"/>	NA	SALT USED -PER REGENERATION-1.22 KG		
<b>ACCESSORIES:</b>			WATER USED - REGENERATION - 25L		
SPECIAL NOTE:			TANK SIZE -10X35		
ALTERNATE BRAND:-HOBART / WINTERHALTER (COMPARATIVE MODEL)			MEDIA LOADED -YES		
			SALT STORAGE CAPACITY - 52 KG		
			<b>FLOW RATE ( ONLY VALVE)</b>		
			FLOW RATE @ 15 PSI PRESSURE DROP - 4500L/H		
			FLOW RATE @ 25 PSI PRESSURE DROP - 5900L/H		
			BACK WASH FLOW RATE -1600L/H		
			SHIPPING WEIGHT - 38.6KG		
			REGENERATION TYPE - DOWN FLOW		
			PIPE SIZE - 3/4"OR 1"		
			PLUMBING CONNECTIONS - INCLUDES 1"STRAIGHT FITTINGS		
			RESIN TYPE - EXTREMELY HIGH CAPACITY ION EXCHANGE RESIN		
			ELECTRICAL REQUIREMENTS - INPUT 110V-120V / 220-240V AC 50/60HZ		
			OUTPUT 12V AC 650MA		
			WATER TEMPERATURE - 3 - ~ 38°C		
			WATER PRESSURE - 0.14 ~ 0.86MPA		


**IMPORTED BOUGHT OUT LIST**

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>TEM NO : PW3</b>			<b>WALL MOUNTED MIXING FAUCET</b>		
<b>QUANTITY: 2</b>					
<b>IMPORTED</b>					
<b>SIZE : IN MM</b>					
<b>WIDTH</b>	<b>DEPTH</b>	<b>HEIGHT</b>			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
<b>T&amp;S</b>	<b>5F- 8WLX12</b>				
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<p>8" Wall Mount Mixing Faucet, Quarter-Turn Ceramic Cartridges, equip Lever Handles, 12" equip Swing Nozzle &amp; 1/2" NPT Female Inlets</p>		
<b>Cold</b>	<input type="checkbox"/>	<b>YES</b>			
<b>Hot</b>	<input type="checkbox"/>	<b>YES</b>			
<b>DRAIN</b>	<input type="checkbox"/>	<b>NA</b>			
<b>ELECTRIC :</b>					
<b>Power</b>					
<b>Voltage</b>					
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
<b>BTU</b>	NA				
<b>Con.</b>	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<p><b>ALTERNATE TO MATCH SPECIFICATION : FISHER</b></p>					


**IMPORTED BOUGHT OUT LIST**

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

<b>ITEM NO : PW5</b>			<b>POT WASHER GRANULDISK MAXI</b>		
<b>QUANTITY: 1</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
<b>WIDTH</b>	<b>DEPTH</b>	<b>HEIGHT</b>			
<b>1452</b>	<b>1089</b>	<b>2039</b>			
<b>BRAND</b>	<b>MODEL</b>	<b>CCO</b>			
<b>GRANULDISK</b>	<b>GRANULE MAXI</b>	<b>SWEDEN</b>			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<b>DESGIN : COMPACT EDITION /FLOW EDITION /FREE FLOW EDITION</b>  <b>WEIGHT ( FILLED/ EMPTY) 666 KG/485 KG</b>  <b>WASH TANK VOLUME : 165 LITERS</b> <b>RINSE WATER VOLUME : 7 LITERS (ECO PROGRAMME)</b> <b>14 LITERS (SHORT /NORMAL PROGRAMME)</b>  <b>GRANULE VOLUME : 16 LITERS</b> <b>MAX. / NORMAL CAPACITY PER HOUR : 192/136 (COMPACT) /192/144 (NORMAL CAPACITY INCL. HANDLING) (FLOW)/ 192/160 (FREE FLOW)</b>  <b>CAPACITY PER PROGRAMME : 8 GN 1/1 OR UPTO 16 GN 1/2 OR 4 GN 2/1 UPTO 200 MM DEPTH OR SIMILAR IN OTHER POTS.</b>		
Cold	<input type="checkbox"/>	YES			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	YES			
<b>ELECTRIC :</b>					
Power	29 KW				
Voltage	3 PHASE				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/>	NA			
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>NO ALTERNATE BRAND</b>					


**IMPORTED BOUGHT OUT LIST**

PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS

ITEM NO : PW6			POT WASHER TROLLEY AND CASSETTE		
QUANTITY: 2					
IMPORTED					
SIZE :					
WIDTH	DEPTH	HEIGHT			
BRAND	MODEL	CCO			
GRANULDISK	MAXI				
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<p><b>CASSETTE SIZE :- 640X700X1100MM</b>  <b>TROLLEY SIZE :- 610X1141X1365MM</b></p> <p><b>CASSETTE TROLLEY.</b>                  Art no. 22845                  For operation of multi-cassette.</p> <p><b>MULTI-CASSETTE FOR GRANULE                  MAXI FLOW/FREEFLOW.</b>                  Art no. 14469                  For 8 GN 1/1 containers or 4 GN 2/1 or                  equivalent in other washware.</p>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	NA				
Voltage	NA				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/>	NA			
Con.	<input type="checkbox"/>	NA			
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>NO ALTERNATE BRAND</b>					


**IMPORTED BOUGHT OUT LIST**

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : M3A</b>			<b>HAND DRYER</b>		
<b>QUANTITY: 5</b>					
<b>LOCAL BOUGHT OUT</b>					
<b>SIZE : IN INCHES</b>					
<b>Width:</b>	<b>Len gth</b>	<b>Height:</b>			
<b>BRAND</b>	<b>MODEL</b>				
<b>EURONIC S</b>	<b>PHD06S</b>				
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			Constructio                      Stainless Steel # 304, Matt Finish n : Mounting :                      Wall Mounted Operation :                      Automatic Hand Dry                              9S Time : Auto Cutoff :                      60 seconds Noise Leve :                      60-70db Motor :                              brush motor Speed :                              30000r/min Voltage :                              220-240V Rated Power                      1000W : Current :                              6A Protection                              IPx4 Class : Blowing                              280m³/h Volume : Air Speed :                              90m/s Warranty:                              1 year		
Cold		NA			
Hot		NA			
DRAIN		NA			
<b>ELECTRIC :</b>					
Power	1 Kw				
Voltage	220V/1PH/50HZ				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	NA				
Con.	<input type="checkbox"/> NA				
<b>ACCESSORIES:</b>					
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : TECHNOCRATS</b>					

**IMPORTED BOUGHT OUT LIST**

**PART B- ATTACHMENT A2.3 - IMPORTED BROUGHT OUT EQUIPMENT SPECIFICATIONS**

<b>ITEM NO : M6</b>			<b>HOSE REEL</b>		
<b>QUANTITY: 2</b>					
<b>IMPORTED</b>					
<b>SIZE :</b>					
Length	Width:	Height:			
<b>BRAND</b>	<b>MODEL</b>	<b>COUNTRY OF ORIGIN</b>			
T&S	B-7142-C02	US			
<b>M.E.P REQUIRMENT</b>			<b>SPECIFICATIONS</b>		
<b>PLUMBING :</b>			<p>Enclosed stainless steel hose reel, stainless steel rear trigger watergun and swivel with 5/16" orifice, 3/8" x 50' heavy-duty non-marking hose, ratcheting system, multi-fit bracket, adjustable hose bumper and 3/8" NPT female inlet.</p> <ul style="list-style-type: none"> <li>• Pressure Max: 125 psi (8.62 bar)</li> <li>• Pressure Min: 20 psi (1.38 bar)</li> <li>• Temperature Max: 200 F (93.33°C)</li> <li>• Temperature Min: 40 F (4.44°C)</li> <li>• Water Gun Flow: 3.7 GPM (14.00 L/min)</li> </ul>		
Cold	<input type="checkbox"/>	NA			
Hot	<input type="checkbox"/>	NA			
DRAIN	<input type="checkbox"/>	NA			
<b>ELECTRIC :</b>					
Power	NA				
Voltage	NA				
<b>EXHAUST</b>					
NA					
<b>GAS:</b>					
BTU	<input type="checkbox"/> NA				
Con.	<input type="checkbox"/> NA				
<b>SPECIAL NOTE:</b>					
<b>ALTERNATE TO MATCH SPECIFICATION : FISHER</b>					

**IMPORTED BOUGHT OUT LIST**

**IMPORTED BOUGHT OUT**